

## Primary lithium batteries CR14335SE 2/3AA 3.0V 1.3Ah



**3.0V Primary lithium-manganese dioxide  
(Li-MnO<sub>2</sub>) Energy type  
2/3AA size bobbin cell**


For **low drain / long term operating** applications requesting superior voltage response in -40°C~+60°C environments.

Cell size references ( 2/3AA )

Alternative models 2/3 AA

|  |   |
|--|---|
| Electrical characteristics<br>(typical values relative to cells stored for one year or less at +30°C max.)   |   |
| Nominal capacity<br>(at 1 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).  | 1.3Ah   |
| Open circuit voltage (at +20°C)  | 3.0V  |
| Nominal voltage (at 1mA +20°C)   | 3.0V  |
| Pulse capability: Typically up to 80 mA (80 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 μA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult ABLE) |   |
| Max. Continuous current  | 8mA   |
| Max. Pulse current   | 80mA  |
| Storage (recommended)<br>(for more severe conditions, consult ABLE)  | +30°C (+86°F) max                                   |
| Operating temperature range<br>(Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult ABLE)  | -40°C / +60°C                                       |
| <b>Physical characteristics</b>  |   |
| Diameter (max)   | 14.5mm(0.57 in)                                     |
| Height (max)   | 33.5mm(1.33 in)                                     |
| Typical weight   | 16g(0.6oz)  |
| Available termination suffix   | radial tabs, radial pins, axial leads, flying leads |

## CR14335SE 2/3AA 3.0V 1.3Ah

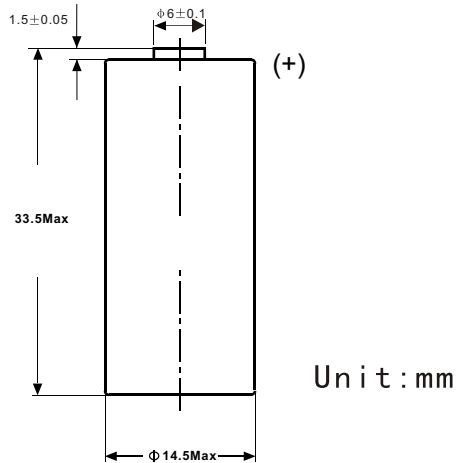

### Key features

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (less than 3% after 1 year of storage at +20°C)
- ▶ Optional stainless steel container for low magnetic and nickel plated steel container for more safe design
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent is recommended
- ▶ Stainless steel container

### Main applications

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others


### Storage

- ▶ The storage area should be clean, cool (not exceeding +30°C), dry and ventilated.

### Warning

- ▶ Do not use if the battery casing was mangled.
- ▶ Don't use different models of battery in series.
- ▶ Soldering the tag should be finished in few seconds.
- ▶ Do not try to recharge.

### Characteristic curves

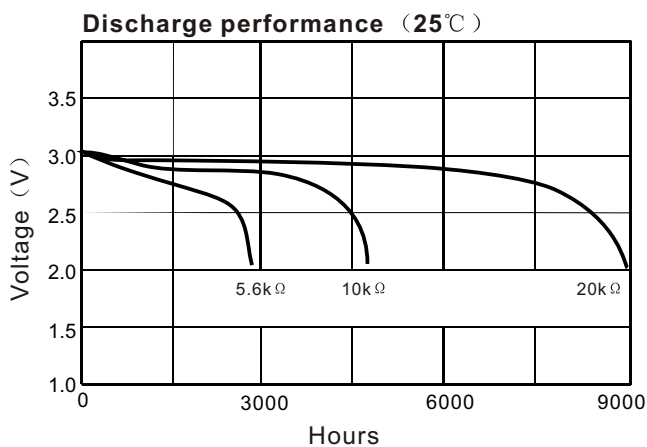

Nominal capacity 1.3Ah (1mA to 2.0V) .